


VEGETABLE PREPARATION MACHINES
CL 50 • CL 50 Ultra • CL 52




RESTAURANTS - INSTITUTIONS - DELICATESSENS - CATERERS



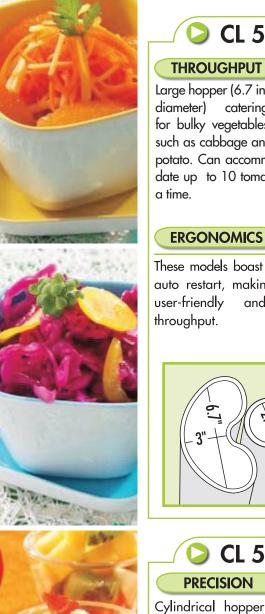







PRODUCTION

Large full-moon hopper (8.9" diameter) for handling bulky vegetables such as potatoes, cabbage and lettuces. This large hopper reduces handling and optimizes throughput.

quantities.

CUTTING QUALITY

CL 52

PRECISION

(2.3") for processing

long or delicate vegeta-

bles with flawless cutting

precision. e.g. carrots,

cucumbers, etc.

The removable partition guarantees optimum cutting quality and regularity - especially when slicing tomatoes or potatoes.

STURDINESS

Stainless-steel motor base.

The truest cut of all - for large and small quantities alike.



Vegetable preparation machines

Table-top models



The main benefits:

Processing capacity:

- Large hopper allowing bulky vegetables, such as
- · lettuces and cabbages, to be processed.

Wide variety of cuts:

- Comprehensive range of 43 discs for slicing, ripplecutting, grating and cutting into sticks, strips or dice (from 5x5x5 mm to 25x25x25 mm) with optimum quality and precision every time.
- 425 rpm single-speed machine ideal for processing delicate foodstuffs, dicing or making french fries, as well as guaranteeing a wide variety of slicing, grating and julienne cuts.

Simple, sturdy design:

- All parts which come into contact with food products can easily be removed for cleaning, thus maintaining the highest standards of sanitation.
- Induction motor for extensive use.



Number of meals:

up to 400 covers



Target:

Institutions, Delicatessens, Caterers, Restaurateurs.



In brief:

Immensely strong, durable, and easy to clean, you will find no other machines to meet your specific day to day needs so precisely or with such apparent ease and efficiency.









The greatest variety of cuts of all!



11 SLICERS
1 mm





3 RIPPLE CUTTERS

2 mm

5 mm





9 GRATERS

1,5 mm

9 mm





9 JULIENNE DISCS

1 x 8 mm

8 x 8 mm





7 DICERS

5 x 5 x 5 mm





3 FRENCH FRIES ATTACHMENTS 8 x 8 mm





	CL 50	CL 50 Ultra Stainless-steel base	CL 52 Stainless-steel base		
Actual outputs	up to 100 lbs/hr.	up to 100 lbs/hr.	up to 150 lbs/hr.		
Theoretical outputs			up to 1½ lbs/min.		
Number of covers per day	covers to		50 to 400 +		

Mashed Potato Attachment

The CL 50 $\,\mathrm{E}$ and CL 50 Ultra $\,\mathrm{E}$ can all be equipped with a mashed potato attachment as an option.

This attachment includes:

- A special grid and a paddle
- A special ejecting plate
- Hopper feed head



Hopper feed head (for CL50 E and CL50 E Ultra only)



A paddle and a special grid available in 3 sizes according to the desired texture: 1.5 mm, 2 mm and 3 mm




A special ejecting disc



	ref.
1 mm (1/32")	28062
2 mm (5/64")	28063
3 mm (1/8")	28064
4 mm (5/32")	28004
5 mm (3/16")	28065
8 mm (5/16")	28066

	ret.
10 mm (3/8")	28067
14 mm (9/16")	28068
Ripple-cut 2 mm (5/64")	27068
Ripple-cut 3 mm (1/8")	27069
Ripple-cut 5 mm (3/16")	27070

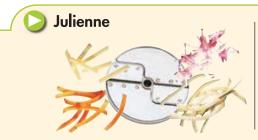

 ref. $3 \times 3 \text{ mm} (1/8" \times 1/8")$ 28101 $4 \times 4 \text{ mm} (5/32" \times 5/32")$ 28052 $6 \times 6 \text{ mm} (1/4" \times 1/4")$ 28053 $8 \times 8 \text{ mm} (5/16" \times 5/16")$ 28054 French fries $8 \times 8 \text{ mm} (5/16" \times 5/16")$ 28134 French fries $10 \times 10 \text{ mm} (3/8" \times 3/8")$ 28135 French fries $10 \times 16 \text{ mm} (3/8" \times 5/8")$ 28158



ref. 1.5 mm (1/16") 2 mm (5/64") 28056 28057 3 mm (1/8") 4 mm (5/32") 28058 28073 5 mm (3/16") 28059 7 mm (9/32") 28016 28060 9 mm (11/32") parmesan 28061 Fine Pulping 28055



	ref.
5 x 5 x 5 mm	28110
8 x 8 x 8 mm	28111
10 x 10 x 10 mm	28112
14 x 14 x 14 mm	28113
20 x 20 x 20 mm	28114
25 x 25 x 25 mm	28115
50 x 70 x 25 mm	28180






- Commercial asynchronous motor for heavy duty to guarantee longer life and reliability.
- Motor has operation ball bearings for quiet, vibration-free running.
- Extra power
- No maintenance
 - No brushes.
 - Stainless steel motor shaft

	Electrical data		Dimensions		Weight (lbs.)			
	Speed (rpm)	Power (HP)	Intensity* (Amp.)	Α	В	С	net	gross
CL 50	425	1.5	120V/60 HZ/ (12)	23 7/16"	13 1/2 "	14 3/4"	45	47
CL 50 Ultra	425	1.5	120V/60 HZ/ (12)	23 7/16"	13 1/2 "	14 3/4"	46	48
CL 52	425	3	120V/60 HZ/ (13.5)	26"	13 1/4 "	14 1/2″	49	51


CL 50 - CL 50 Ultra



* Other voltages available



CL 52



robot @ coupe°

Robot Coupe U.S.A., Inc.

P.O. Box 16625 Jackson, MS 39236-6625 1-800-824-1646 (601) 898-8411 FAX: (601) 898-9134 email: info@robotcoupeusa.com

www.robotcoupeusa.com

Distributor



RIO INTERNATIONAL LLC

Head Office & Showroom:
P.O.Box 12900, Al Garhoud Center, Dubai
United Arab Emirates (UAE).
Web: www.riodubai.com
Email: info@riodubai.com

Telephone No.: +971 4 283 3311 Fax No.: +971 4 283 3322



ETL LISTED 9900098
Conforms to
UL NSF/ANSI
Std 763 Std 8
Certified to
CAN/CSA
Std C22.2 No.195

We reserve the right to alter at any time without notice the technical specifications of this appliance. None of the information contained in this document is of a contractual nature. Modifications may be made at any time.

© All rights reserved for all countries by : ROBOTCOUPE s.n.c.