

Catering

Depth 715 mm

Cabinet Smart 600 lt 0°+10°C 1 door

Code: **A60/1NE**

Model: **A120601001**

Exterior/interior finishing:

- Stainless steel AISI 304 18/10
- Back in galvanised steel

Insulation:

- 75 mm thickness - CFC/HCFC free

Cover evaporator:

- Removable in PVC

Internal racks and slides:

- Stainless steel AISI 304 18/10

Inner corners:

- Rounded cornes ensuring maximum hygiene

Feet:

- Stainless steel AISI 304 adjustable 100-150 mm

Door:

- Self-closing, reversible with 105° dwell

Door handle:

- Integrated in PVC

Door gasket:

- Magnetic, easy to replace




Constructional data




• Dimensions	740×715×2085 mm
• Packing dimensions	760×750×2250 mm
• Net weight	120 Kg
• Gross capacity	600 lt
• Temperature range	0°+10°C
• Cooling capacity	368 W*
• Standard connection	230 V - 50 Hz
• Total rate	328 W - 1,8 A
• Cooling gas	R404a
• Standard equipment	N. 3 plastic coated shelves - 530×530 mm Key lock
• *Evap. -10°C cond. 54,4°C	

Features

 Plastic coated shelf 530×530 mm
Code O223530530



Kit of 4 swivel and brake castors in stainless steel AISI 304
Code O444000020

 Pair of slides type C - 505 mm
Code O121150520



Lighting kit 07
Code O820700020

Accessories



Cold Line S.r.l. • Via Roma, 324 • 35030 Montemerlo di C.S.C. • Padova - Italy • www.coldline.it • info@coldline.it

In order to constantly offer the best possible products, we reserve the right to make changes on technical specifications without incurring any obligation for equipment previously or subsequently sold.



Coldline made major investments in design research, becoming a leader in technology and innovation. Each cabinet marked with the FSSsymbol is equipped with a refrigeration system independent of the structure, which provides improved flexibility and service.



FSS • Fast Service System

FSS • FAST SERVICE SYSTEM

- You can change the intended use of an appliance, a freezer into a chiller - and the other way around - even after years of installation.
- You can extend the life of a refrigeration cabinet by replacing its old refrigeration system with a new one.
- Maintenance and service are simple, quick and do not require specialised personnel.

NO-COMPROMISE QUALITY STEEL

AISI 304

AISI 304 18/10 is a high quality steel. Its stability guarantees good-looking and durable products, ensuring maximum hygiene and corrosion resistance over time.

75 mm

INSULATION THICKNESS

The 75 mm thick insulation ensures lower heat loss, reduced work of the compressor, therefore lower energy consumption.

INTELLIGENT DEFROST



Intelligent defrost changes according to the actual presence of frost. The system runs for the minimum time required.

EVAPORATION SYSTEM



The automatic evaporation of condensing water is activated only in the presence of water produced as a result of a defrost cycle.

CONSTANT TEMPERATURE




The fans stop when the door is opened to reduce temperature changes and consequently reduce the work of the compressor.

ASPERA COMPRESSORS



Aspera compressors reduce energy consumption by 15% and acoustic impact by 5 dBA.

Focus

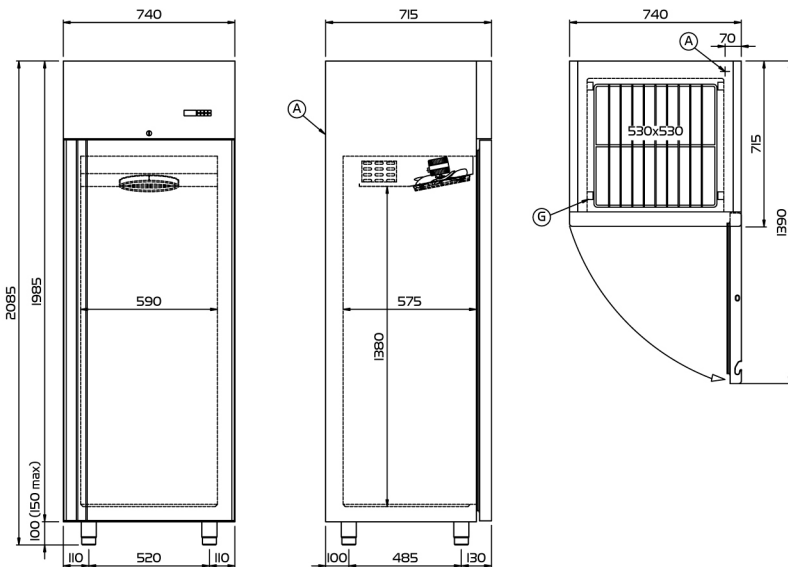

(A) POWER SUPPLY CABLE OUTLET

(G) RACKS PITCH



Technical drawing

