



SEVEL
SHOWCASE

Millennium II

MILLENNIUM II is a younger design of MILLLENNIUM. More aluminium and stainless steel has been used to give a younger look.



SEVEL
SHOWCASE

90 degrees curved corner units are available in MILLENNIUM II. It is possible to multiplex the showcases to create endless decoration solutions.



MILLENNIUM II Showcases can be used to display gelato, ice-cream, pastry, bakery, charcuterie, chocolate

Pastry cases can be produced with or without pull-out drawers

Pastry cases have 3 display shelves with rising temperature starting from the base

You can choose night blind or plexi glass door as the backcover of your MILLENNIUM II



M(II) 18 - GELATO



M(II) 24 - PASTRY



M(II) CORNER GELATO + M(II) 12 PASTRY



M(II) 24 - COMBO

Technical Specifications

	TROY				TROY PASTRY				TROY S	ASPEN (II)											ASPEN (II) COMBO	ASPEN (II) CORNER
	T12-G	T16-G	T18-G	T24-G	T12-P	T16-P	T18-P	T24-P		A(II)12-G	A(II)16-G	A(II)18-G	A(II)20-G	A(II)24-G	A(II)12-P	A(II)16-P	A(II)18-P	A(II)20-P	A(II)24-P	A(II)20-C	A(II)24-C	A(II)Corner
LENGTH																						
millimeters	1225	1559	1732	2251	1225	1559	1732	2251	...	1255	1575	1765	1975	2325	1255	1575	1765	1975	2325	1975	2325	...
inches	48.23'	61.38'	68.19'	88.62'	48.23'	61.38'	68.19'	88.62'	...	49.90'	62'	69.49'	77.76'	91.54'	49.40'	62'	69.49'	77.76'	91.54'	77.76'	91.54'	...
DEPTH																						
millimeters	1190	1190	1190	1190	1245	1245	1245	1245	1190	1140	1140	1140	1140	1140	1150	1150	1150	1150	1150	1150	1150	1140
inches	46.85'	46.85'	46.85'	46.85'	49'	49'	49'	49'	46.85'	44.88'	44.88'	44.88'	44.88'	44.88'	45.28'	45.28'	45.28'	45.28'	45.28'	45.28'	45.28'	44.88'
HEIGHT																						
millimeters	1380	1380	1380	1380	1380	1380	1380	1380	1380	1380	1380	1380	1380	1380	1380	1380	1380	1380	1380	1380	1380	1380
inches	54.33'	54.33'	54.33'	54.33'	54.33'	54.33'	54.33'	54.33'	54.33'	54.3'	54.3'	54.3'	54.3'	54.3'	54.3'	54.3'	54.3'	54.3'	54.3'	54.3'	54.3'	54.3'
WEIGHT																						
Net Kg.	250	370	397	460	240	330	357	420	246	295	440	460	485	525	300	350	375	400	450	406	525	260
Gross Kg.	330	455	490	580	320	420	450	540	316	400	560	590	610	655	405	465	490	520	570	525	575	335
CAPACITY OF PANS	12x5Lt. 8x7Lt.	16x5Lt. 10x7Lt.	18x5Lt. 12x7Lt.	24x5Lt. 16x7Lt.	...	...	...	...	11x5Lt. 9x5Lt.	...	...	...	...	...	...	...	...	...	...	10x5Lt.	12x5Lt.	13 Pans: 9x5Lt. 4x6Lt.
POWER OF COMPRESSORS	1130W	782+700W	782+782W	1130+782W	490W	580W	630W	1170W	1400W	1130W	782+700W	782+782W	1130+782W	1130+782W	490W	580W	630W	780W	1170W	1130+490W	1130+490W	1400W
REFRIGERANT	R404a	R404a	R404a	R404a	R134a	R134a	R134a	R134a	R404a	R404a	R404a	R404a	R404a	R404a	R134a	R134a	R134a	R134a	R134a	R404a+R134a	R404a+R134a	R404a
RUNNING TEMPERATURE AT 35C / 95F, 60% AT 35C AT 95F	-18/-22C 0/-7.6F	-18/-22C 0/-7.6F	-18/-22C 0/-7.6F	-18/-22C 0/-7.6F	+4/+8C +39/+46F	+4/+8C +39/+46F	+4/+8C +39/+46F	+4/+8C +39/+46F	-15/-20C 5/-4F	-18/-22C 0/-7.6F	-18/-22C 0/-7.6F	-18/-22C 0/-7.6F	-18/-22C 0/-7.6F	-18/-22C 0/-7.6F	+4/+8C +39/+46F	+4/+8C +39/+46F	+4/+8C +39/+46F	+4/+8C +39/+46F	+4/+8C +39/+46F	(-18/-22C) (+4/+8C) (0/-7.6F) (+39/+46F)	(-18/-22C) (+4/+8C) (0/-7.6F) (+39/+46F)	-15/-20C 5/-4F
RELATIVE HUMIDITY																						
POWER SUPPLY	220/1/ 50-60Hz 400/3/50-60Hz	220/1/ 50-60Hz 400/3/50-60Hz	220/1/ 50-60Hz 400/3/50-60Hz	220/1/ 50-60Hz 400/3/50-60Hz	220/1/ 50-60Hz	220/1/ 50-60Hz	220/1/ 50-60Hz	220/1/ 50-60Hz	220/1/ 50-60Hz 400/3/50-60Hz	220/1/ 50-60Hz or 400/3/50-60Hz	220/1/ 50-60Hz or 400/3/50-60Hz	220/1/ 50-60Hz or 400/3/50-60Hz	220/1/ 50-60Hz or 400/3/50-60Hz	220/1/ 50-60Hz or 400/3/50-60Hz	220/1/50-60Hz	220/1/50-60Hz	220/1/50-60Hz	220/1/50-60Hz	220/1/50-60Hz	220/1/50-60Hz	220/1/50-60Hz	220/1/ 50-60Hz or 400/3/50-60Hz
COMPRESSOR TYPE	HERMETIC	HERMETIC	HERMETIC	HERMETIC	HERMETIC	HERMETIC	HERMETIC	HERMETIC	HERMETIC	HERMETIC	HERMETIC	HERMETIC	HERMETIC	HERMETIC	HERMETIC	HERMETIC	HERMETIC	HERMETIC	HERMETIC	HERMETIC	HERMETIC	HERMETIC
REFRIGERATION SYSTEM	FORCED AIR	FORCED AIR	FORCED AIR	FORCED AIR	FORCED AIR	FORCED AIR	FORCED AIR	FORCED AIR	FORCED AIR	FORCED AIR	FORCED AIR	FORCED AIR	FORCED AIR	FORCED AIR	FORCED AIR	FORCED AIR	FORCED AIR	FORCED AIR	FORCED AIR	FORCED AIR	FORCED AIR	FORCED AIR
DEFROSTING	AUTOMATIC	AUTOMATIC	AUTOMATIC	AUTOMATIC	AUTOMATIC	AUTOMATIC	AUTOMATIC	AUTOMATIC	AUTOMATIC	AUTOMATIC	AUTOMATIC	AUTOMATIC	AUTOMATIC	AUTOMATIC	AUTOMATIC	AUTOMATIC	AUTOMATIC	AUTOMATIC	AUTOMATIC	AUTOMATIC	AUTOMATIC	AUTOMATIC
DEFROSTING TYPE	HOT GAS + RESISTANCE	HOT GAS + RESISTANCE	HOT GAS + RESISTANCE	HOT GAS + RESISTANCE	RESISTANCE	RESISTANCE	RESISTANCE	RESISTANCE	HOT GAS + RESISTANCE	HOT GAS + RESISTANCE	HOT GAS + RESISTANCE	HOT GAS + RESISTANCE	HOT GAS + RESISTANCE	HOT GAS + RESISTANCE	RESISTANCE	RESISTANCE	RESISTANCE	RESISTANCE	RESISTANCE	HOT GAS + RESISTANCE	HOT GAS + RESISTANCE	HOT GAS + RESISTANCE



MILLENNIUM (II)

MILLENNIUM(II) GELATO

MILLENNIUM(II) PASTRY

MILLENNIUM(II) COMBO

	M(II)12-G	M(II)16-G	M(II)18-G	M(II)20-G	M(II)24-G	M(II)12-P	M(II)16-P	M(II)18-P	M(II)20-P	M(II)24-P	M(II)20-C	M(II)24-C
LENGTH												
millimeters	1280	1600	1790	2000	2350	1280	1600	1790	2000	2350	2000	2350
inches	50.4'	63'	70.4'	78.7'	92.5'	50.4'	63'	70.4'	78.7'	92.5'	78.7'	92.5'
DEPTH												
millimeters	1100	1100	1100	1100	1100	1180	1180	1180	1180	1180	1180	1180
inches	43.3'	43.3'	43.3'	43.3'	43.3'	46.5'	46.5'	46.5'	46.5'	46.5'	46.5'	46.5'
HEIGHT												
millimeters	1385	1385	1385	1385	1385	1385	1385	1385	1385	1385	1385	1385
inches	54.5'	54.5'	54.5'	54.5'	54.5'	54.5'	54.5'	54.5'	54.5'	54.5'	54.5'	54.5'
WEIGHT												
Net Kg.	295	440	460	485	525	300	350	375	400	450	406	525
Gross Kg.	400	560	590	610	655	405	465	490	520	520	570	525
CAPACITY OF PANS	12x5Lt. 8x7Lt.	16x5Lt. 10x7Lt.	18x5Lt. 12x7Lt.	20x5Lt. 14x7Lt.	24x5Lt. 16x7Lt.	...	...	...	...	...	10x5Lt.	12x5Lt.
POWER OF COMPRESSORS	1130W	782+700W	782+782W	1130+782W	1130+782W	490W	580W	630W	780W	1170W	1130+490W	1130+490W
REFRIGERANT	R404a	R404a	R404a	R404a	R404a	R134a	R134a	R134a	R134a	R134a	R404a+R134a	R404a+R134a
RUNNING TEMPERATURE AT 35C / 95F, 60%	-18/-22C	-18/-22C	-18/-22C	-18/-22C	-18/-22C	+4/+8C	+4/+8C	+4/+8C	+4/+8C	+4/+8C	(-18/-22C) (+4/+8C)	(-18/-22C) (+4/+8C)
AT 35C	0/-7.6F	0/-7.6F	0/-7.6F	0/-7.6F	0/-7.6F	+39/+46F	+39/+46F	+39/+46F	+39/+46F	+39/+46F	(0/-7.6F) (+39/+46F)	(0/-7.6F) (+39/+46F)
AT 95C												
RELATIVE HUMIDITY												
POWER SUPPLY	220/1/ 50-60Hz or 400/3/50-60Hz	220/1/ 50-60Hz or 400/3/50-60Hz	220/1/ 50-60Hz or 400/3/50-60Hz	220/1/ 50-60Hz or 400/3/50-60Hz	220/1/ 50-60Hz or 400/3/50-60Hz	220/1/ 50-60Hz	220/1/ 50-60Hz	220/1/ 50-60Hz or	220/1/ 50-60Hz or	220/1/ 50-60Hz or	220/1/ 50-60Hz	220/1/ 50-60Hz
COMPRESSOR TYPE	HERMETIC	HERMETIC	HERMETIC	HERMETIC	HERMETIC	HERMETIC	HERMETIC	HERMETIC	HERMETIC	HERMETIC	HERMETIC	HERMETIC
REFRIGERATION SYSTEM	VENTILATED	VENTILATED	VENTILATED	VENTILATED	VENTILATED	VENTILATED	VENTILATED	VENTILATED	VENTILATED	VENTILATED	VENTILATED	VENTILATED
DEFROSTING	AUTOMATIC	AUTOMATIC	AUTOMATIC	AUTOMATIC	AUTOMATIC	AUTOMATIC	AUTOMATIC	AUTOMATIC	AUTOMATIC	AUTOMATIC	AUTOMATIC	AUTOMATIC
DEFROSTING TYPE	HOT GAS + RESISTANCE	HOT GAS + RESISTANCE	HOT GAS + RESISTANCE	HOT GAS + RESISTANCE	HOT GAS + RESISTANCE	RESISTANCE	RESISTANCE	RESISTANCE	RESISTANCE	RESISTANCE	HOT GAS + RESISTANCE	HOT GAS + RESISTANCE



Technical Specifications

	EPHESUS(II)				EPHESUS(II) PASTRY				EPHESUS(II) COMBO		BAROQUE					BAROQUE PASTRY				
	E(II)12-G	E(II)16-G	E(II)18-G	E(II)20-G	E(II)12-P	E(II)16-P	E(II)18-P	E(II)20-P	E(II)20-C	E(II)24-C	B12-G	B16-G	B18-G	B20-G	B24-G	B12-P	B16-P	B18-P	B20-P	B24-P
LENGTH																				
millimeters	1280	1600	1790	2000	1280	1600	1790	2000	2000	2350	1270	1590	1780	1990	2340	1270	1590	1780	1990	2340
inches	50.4'	63'	70.4'	78.7'	50.4'	63'	70.4'	78.7'	78.7"	92.5'	50'	62.6'	70'	73.3'	92.1'	50'	62.6'	70'	73.3'	92.1'
DEPTH																				
millimeters	950	950	950	950	980	980	980	980	980	980	1080	1080	1080	1080	1080	1140	1140	1140	1140	1140
inches	37.4'	37.4'	37.4'	37.4'	38.6'	38.6'	38.6'	38.6'	38.6'	38.6'	42.5'	42.5'	42.5'	42.5'	42.5'	44.9'	44.9'	44.9'	44.9'	44.9'
HEIGHT																				
millimeters	1385	1385	1385	1385	1385	1385	1385	1385	1385	1385	1475	1475	1475	1475	1475	1475	1475	1475	1475	1475
inches	54.5'	54.5'	54.5'	54.5'	54.5'	54.5'	54.5'	54.5'	54.5'	54.5'	58'	58'	58'	58'	58'	58'	58'	58'	58'	58'
WEIGHT																				
Net Kg.	188	280	294	308	192	224	240	270	290	330	295	440	460	485	525	300	350	375	400	450
Gross Kg.	270	370	386	402	274	314	332	350	370	420	400	560	590	610	655	405	465	490	520	570
CAPACITY OF PANS	E(II)-G:9x5Lt. E(II)-GX:12x4Lt.	E(II)-G:12x5Lt. E(II)-GX:16x4Lt.	E(II)-G:13x5Lt. E(II)-GX:18x4Lt.	E(II)-G:15x5Lt. E(II)-GX:20x4Lt.	...	...	...	...	E(II)-G:7x5Lt. E(II)-GX:10x4Lt.	E(II)-G:9x5Lt. E(II)-GX:11x4Lt.	12x5Lt.	16x5Lt.	18x5Lt.	20x5Lt.	24x5Lt.	...	...	...	...	...
POWER OF COMPRESSORS	782W	1130W	782+630W	782+700W	480W	590W	630W	780W	780+390W	1130+480W	1130W	782+700W	782+782W	1130+782W	1130+782W	490W	580W	630W	780W	1170W
REFRIGERANT	R404a	R404a	R404a	R404a	R134a	R134a	R134a	R134a	R404a+R134a	R404a+R134a	R404a	R404a	R404a	R404a	R404a	R134a	R134a	R134a	R134a	R134a
RUNNING TEMPERATURE AT 35C / 95F, 60% AT 35C AT 95F	-18/-22C 0/-7.6F	-18/-22C 0/-7.6F	-18/-22C 0/-7.6F	-18/-22C 0/-7.6F	+4/+8C +39/+46F	+4/+8C +39/+46F	+4/+8C +39/+46F	+4/+8C +39/+46F	(-18/-22C) (+4/+8C) 0/-7.6F (+39/+46F)	(-18/-22C) (+4/+8C) 0/-7.6F (+39/+46F)	-18/-22C 0/-7.6F	-18/-22C 0/-7.6F	-18/-22C 0/-7.6F	-18/-22C 0/-7.6F	-18/-22C 0/-7.6F	+4/+8C +39/+46F	+4/+8C +39/+46F	+4/+8C +39/+46F	+4/+8C +39/+46F	+4/+8C +39/+46F
RELATIVE HUMIDITY																				
POWER SUPPLY	220/1/ 50-60Hz	220/1/ 50-60Hz	220/1/ 50-60Hz	220/1/ 50-60Hz	220/1/ 50-60Hz	220/1/ 50-60Hz	220/1/ 50-60Hz	220/1/ 50-60Hz	220/1/ 50-60Hz	220/1/ 50-60Hz	220/1/ 50-60Hz 400/3/50-60Hz	220/1/ 50-60Hz 400/3/50-60Hz	220/1/ 50-60Hz or 400/3/50-60Hz	220/1/ 50-60Hz or 400/3/50-60Hz	220/1/ 50-60Hz or 400/3/50-60Hz	220/1/ 50-60Hz	220/1/ 50-60Hz	220/1/ 50-60Hz	220/1/ 50-60Hz	220/1/ 50-60Hz
COMPRESSOR TYPE	HERMETIC	HERMETIC	HERMETIC	HERMETIC	HERMETIC	HERMETIC	HERMETIC	HERMETIC	HERMETIC	HERMETIC	HERMETIC	HERMETIC	HERMETIC	HERMETIC	HERMETIC	HERMETIC	HERMETIC	HERMETIC	HERMETIC	HERMETIC
REFRIGERATION SYSTEM	VENTILATED	VENTILATED	VENTILATED	VENTILATED	VENTILATED	VENTILATED	VENTILATED	VENTILATED	VENTILATED	VENTILATED	VENTILATED	VENTILATED	VENTILATED	VENTILATED	VENTILATED	VENTILATED	VENTILATED	VENTILATED	VENTILATED	VENTILATED
DEFROSTING	AUTOMATIC	AUTOMATIC	AUTOMATIC	AUTOMATIC	AUTOMATIC	AUTOMATIC	AUTOMATIC	AUTOMATIC	AUTOMATIC	AUTOMATIC	AUTOMATIC	AUTOMATIC	AUTOMATIC	AUTOMATIC	AUTOMATIC	AUTOMATIC	AUTOMATIC	AUTOMATIC	AUTOMATIC	AUTOMATIC
DEFROSTING TYPE	HOT GAS + RESISTANCE	HOT GAS + RESISTANCE	HOT GAS + RESISTANCE	HOT GAS + RESISTANCE	RESISTANCE	RESISTANCE	RESISTANCE	RESISTANCE	HOT GAS + RESISTANCE	HOT GAS + RESISTANCE	HOT GAS + RESISTANCE	HOT GAS + RESISTANCE	HOT GAS + RESISTANCE	HOT GAS + RESISTANCE	HOT GAS + RESISTANCE	RESISTANCE	RESISTANCE	RESISTANCE	RESISTANCE	RESISTANCE



TYPES OF PANS



[illegible]

ASPEN II

Technical drawings of Aspen II valves, showing side views and top views of the valve seats.

Side Views:


- Left side view: Dimensions include 245 (19.45"), 100 (4.00"), 100 (4.00"), 100 (4.00"), 100 (4.00"), 100 (4.00"), 100 (4.00"), 100 (4.00"), 100 (4.00"), 100 (4.00"), 100 (4.00"), 100 (4.00").
- Right side view: Dimensions include 245 (19.45"), 100 (4.00"), 100 (4.00"), 100 (4.00"), 100 (4.00"), 100 (4.00"), 100 (4.00"), 100 (4.00"), 100 (4.00"), 100 (4.00"), 100 (4.00"), 100 (4.00").

Top Views of Valve Seats:


- A 24 - G:** Dimensions 2290 (90.16") x 2158 (85.00").
- A 20 - G:** Dimensions 1910 (75.20") x 1908 (75.12").
- A 18 - G:** Dimensions 1700 (66.93") x 1598 (62.91").
- A 16 - G:** Dimensions 1510 (59.45") x 1408 (55.43").
- A 12 - G:** Dimensions 1190 (46.87") x 1098 (43.23").

[illegible]


EPHESUS II

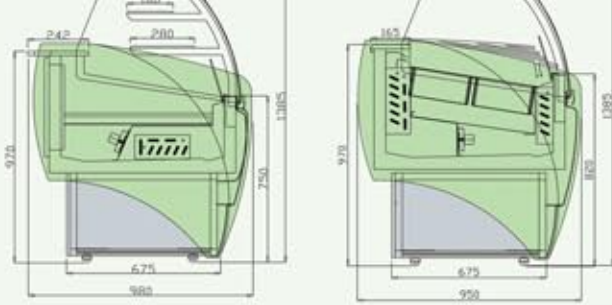

Technical drawings of the Ephesus II lighting fixture, showing front and side views with dimensions. The front view shows a width of 960mm and a height of 1305mm. The side view shows a depth of 950mm and a height of 1305mm. The fixture is green and has a curved top.

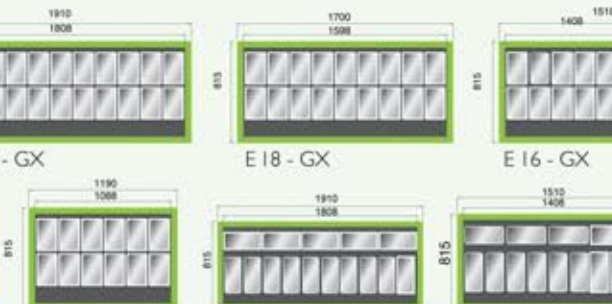

Technical drawings of the Ephesus II lighting fixture, showing front and side views with dimensions. The front view shows a width of 960mm and a height of 1305mm. The side view shows a depth of 950mm and a height of 1305mm. The fixture is green and has a curved top.

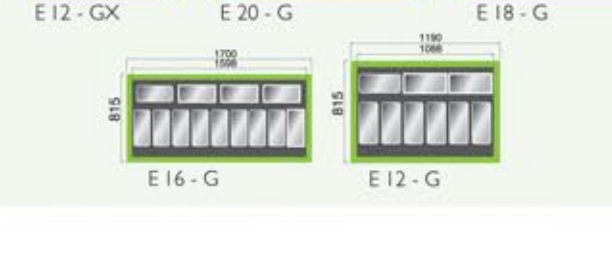

Technical drawings of the Ephesus II lighting fixture, showing front and side views with dimensions. The front view shows a width of 960mm and a height of 1305mm. The side view shows a depth of 950mm and a height of 1305mm. The fixture is green and has a curved top.

BAROQUE

ASPEN CORNER

Technical drawing of the Aspen Corner section, showing a cross-section of a corner with multiple layers and dimensions. The drawing includes the following dimensions:

- Top horizontal dimension: 1991 (78.43)
- Top horizontal dimension: 1291 (50.43)
- Left vertical dimension: 478 (18.83)
- Right vertical dimension: 1127 (44.43)
- Bottom horizontal dimension: 399 (15.73)
- Bottom-left diagonal dimension: 1143 (44.88)

TROY S

Technical drawing of the Troy S section, showing a cross-section of a curved structure with multiple layers and dimensions. The drawing includes the following dimensions:

- Top horizontal dimension: 1625 (64.03)
- Top horizontal dimension: 45"
- Left vertical dimension: 1025 (40.33)
- Bottom-left diagonal dimension: 100 (4.03)
- Bottom-right diagonal dimension: 703 (28.53)
- Right vertical dimension: 1000 (39.37)

Optional Accessories

Night Blind or Plexi-Sliding Doors



Scoop Washer



Illuminated Front Panel with your own Design



Engineering

Quality Control

Every SEVEL showcase is subjected to severe control and inspection tests in all stages of production. During and after production, in our test rooms, we use an IT system to control and record the frequencies the showcase undergoes in different climate conditions. These tests are repeated until our engineers are satisfied with the final test results.



Our quality is not only established, but also certified. In addition to the CE mark, our gelato/ice cream showcases are ETL listed.



Research & Development

SEVEL showcases are designed by top-quality creative Engineers who are focused on achieving extremely high quality standards by doing lots of Research & Development.

