

JEROS 8100 Dish Washer

Smarter Thinking - Smarter Solutions



There is always space for the new JEROS!







The robust JEROS-8100 will fit into the smallest of spaces, and in spite of its size it has a superb wash performance!

- ✓ Extended loading area
- ✓ With a width of 60 cm the machine will surely fit the existing table
- ✓ With fingertouch micro controller
- ✓ With automatic start
- ✓ With automatic opening of lid
- ✓ Integrated self-cleaning system with 85° degrees C hot water
- ✓ With automatic soap dosage
- ✓ Integrated pumped rinse system
- ✓ Electrical outputs to switch extractor
- ✓ As option with insulated lid



There are a variety of reasons to choose a JEROS Dish Washer!



-  The strong stainless steel construction, unique design, combined with more than 40 years of expertise, guarantees a very high reliability.
-  Lid construction: The special automatic opening function insures an optimum integration of the machine in the daily work, furthermore it allows ergonomically correct loading of the machine.
-  The 85° degrees C hot end rinse with a pressure pump ensures that the maximum hygiene is achieved without the use of Chemical Sanitant, Another Advantage is that the rinse is pumped and does not rely on mains water pressure.
-  A sensor operated detergent dosing system, minimum use of soap, heating elements with low energy consumption, small wash tank, and uniquely low use of water, ensures an optimum wash result and thereby also an environmentally safe wash.
-  3 pre-set wash cycles of 1 / 2 / 4 Minutes.
-  Meets HACCP and CE-requirements.




Technical data

Drain dimension	Ø mm
Voltage	Volt+E/Hz
Connecting power (standart)	kW
Water connection	R"
Wash time	Min.
Wash area	H x B x T
Wash tank volume	Litre
Rinse time	apprx. sec.
Rinse tank volume	apprx. litre
Rinse water temperature	apprx. °C
Water consumption per wash/rinse	apprx. litre

8100

40
400 / PE / 50
8,5
1/2
1 / 2 / 4
405x500x500
40
20
13
85
3,5

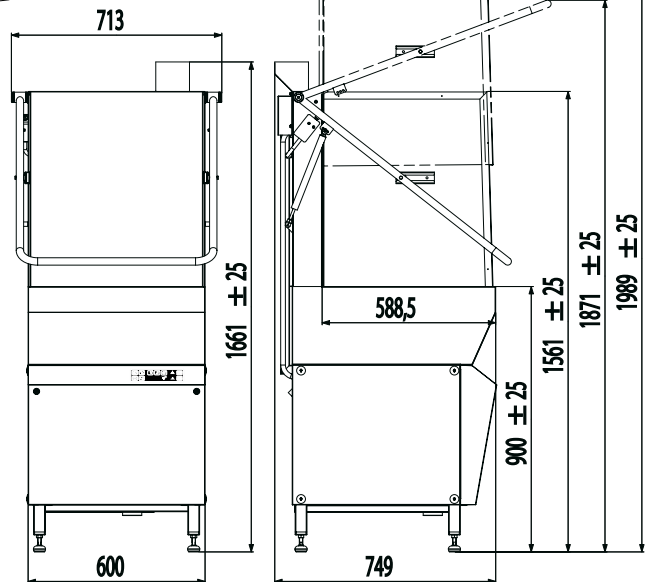

JEROS distributor:



JEROS A/S

Nyborgvej 8
DK-5750 Ringe

Tel: 0045 63 62 39 13
Fax: 0045 62 62 33 01

jeros@jeros.co
www.jeros.co